


COPPER SHEAR BOLT CONNECTORS

These are copper alloy straight connectors that are intended to be used in low and medium voltage applications from #3 AWG up to 1000 Kcmil with **copper conductors only**. These can be installed using tape, cold shrink or heat shrink splicing applications.

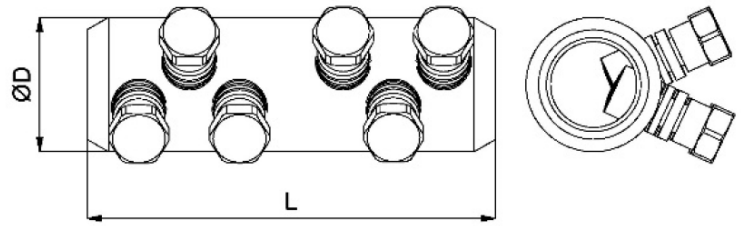

Reference	Section AWG/MCM	Bolts	OD	L	HEX Socket
PCS09C*	#3 AWG - 4/0 AWG 27 - 107 mm ²	2	0.98" 25 mm	2.75" 70 mm	3/4" 19 mm
PCS10C*	#2 AWG - 250 Kcmil 34 - 127 mm ²	2	1.18" 30 mm	2.75" 70 mm	3/4" 19 mm
PCS11C*	4/0 AWG - 500 Kcmil 107 - 253 mm ²	4	1.38" 35 mm	4.37" 111 mm	3/4" 19 mm
PCS15C*	4/0 AWG - 750 Kcmil 107 - 380 mm ²	4	1.57" 40 mm	4.37" 111 mm	3/4" 19 mm
PCS15C-3C**	350 - 500 - 750 Kcmil 177 - 380 mm ²	6	1.85" 47 mm	5.71" 145 mm	3/4" 19 mm
PCS12C	500 - 1000 Kcmil 253 - 507 mm ²	6	1.97" 50 mm	6.10" 155 mm	3/4" 19 mm
PCS12MC	1000 Kcmil 507 mm ²	8	1.85" 47 mm	5.60" 142 mm	3/4" 19 mm

*Add 'HS' for connector + heat shrink tube kit

**For Copper 1/C and 3/C PILC Round/Compact and Sector Cables

FEATURES

Material: Body: Copper
Bolts: Brass

Voltage: Up to 36 kV

Tools: 3/4" HEX (six point) **deep well** impact socket required.
18V battery impact tool recommended

GRESKO

Phone: (877) 743-0622

Website: www.PowerConnectors.net

Email: pcs@gresco.com

PCS