



STRAIGHT REPAIR TYPE SHEAR BOLT CONNECTORS

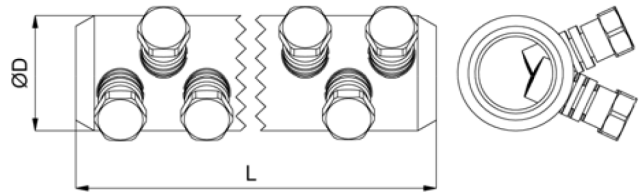

These are multi-range tin plated aluminum alloy step connectors with a solid center barrier designed for both aluminum and copper conductors. These connectors are for use in low and medium voltage applications.

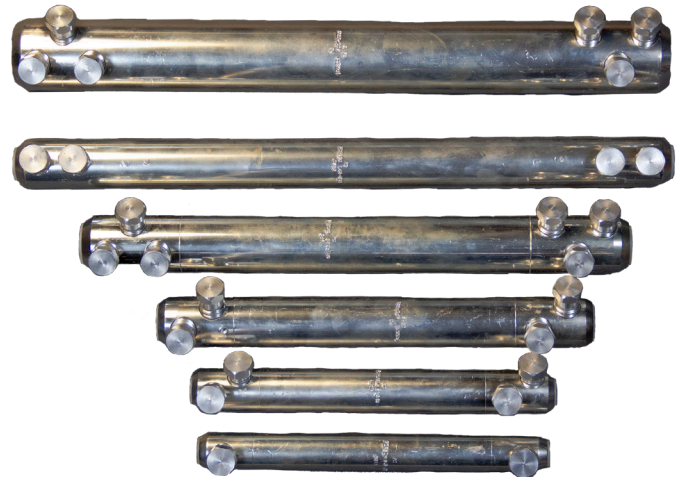

Reference	Section	Bolts	ØD	L	HEX Socket
PCRS09	#6 AWG - 4/0 AWG 13 - 107 mm ²	2	0.98" 25 mm	9.44" 240 mm	3/4" 19 mm
PCRS09HS*	#6 AWG - 4/0 AWG 13 - 107 mm ²	2	0.98" 25 mm	9.44" 240 mm	3/4" 19 mm
PCRS18	#2 AWG - 250 Kcmil 34 - 127 mm ²	4	1.18" 30 mm	9.76" 250 mm	3/4" 19 mm
PCRS19	4/0 AWG - 500 Kcmil 107 - 253 mm ²	4	1.38" 35 mm	11.80" 300 mm	3/4" 19 mm
PCRS20	4/0 AWG - 750 Kcmil 107 - 380 mm ²	6	1.57" 40 mm	15" 380 mm	3/4" 19 mm
PCRS21	500 - 1000 Kcmil 253 - 507 mm ²	6	1.97" 50 mm	17.91" 455 mm	3/4" 19 mm
PCRS22	1/0 AWG - 350 Kcmil 53 - 177 mm ²	4	1.38" 35 mm	17.91" 455 mm	3/4" 19 mm

*HS connector includes heat shrink tube

FEATURES

Material: Body: High tensile tin-plated aluminum alloy
Bolts: High tensile strength aluminum alloy

Voltage: Up to 36 kV

Tools: 3/4" HEX (six point) **deep well** impact socket required.
18V battery impact tool recommended

GRESKO

Phone: (877) 743-0622

Website: www.PowerConnectors.net

Email: pcs@gresco.com

